

# Bridge beam assembly



**M&S HIRE**  
alloy towers

▼ PARTS LIST

Bride Beam Length	2.0M	2.5M	3.0M
Parts List			
Bridge Beam	2	2	2
Horizontal Brace*	6	6	6
Plain Platform*	3	4	5
Toeboards*	2	2	2
Toeboard Connector	4	4	4



Ensure towers that are to be linked are levelled equally. Clip beams with hooks facing inwards to vertical members of towers. Plain tube at the top, hook to the bottom.

Link beams with appropriate platforms, fit guard rails and toe boards.

SWL 750kg distributed load

\* Available in three lengths 2M, 2.5M or 3M to correspond with appropriate Tower length

TUV CERTIFIED QUALITY SYSTEM TO ISO9001:2000  
GS PRODUCT APPROVAL TO DIN 4422-1 1992-08 (HD1004)

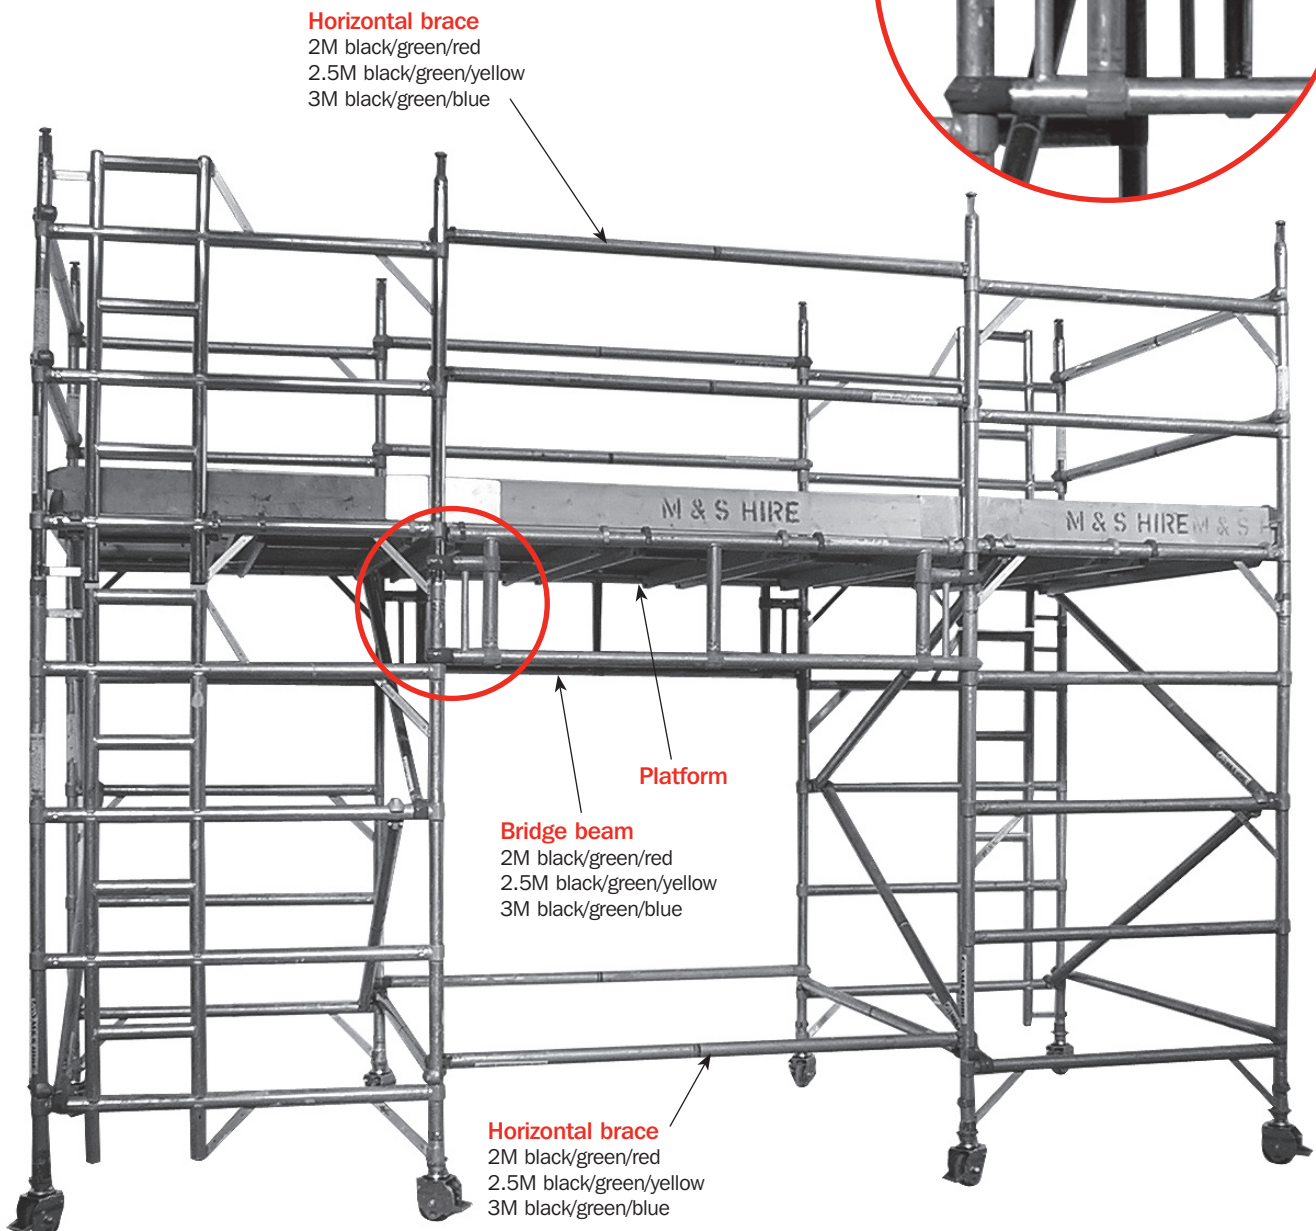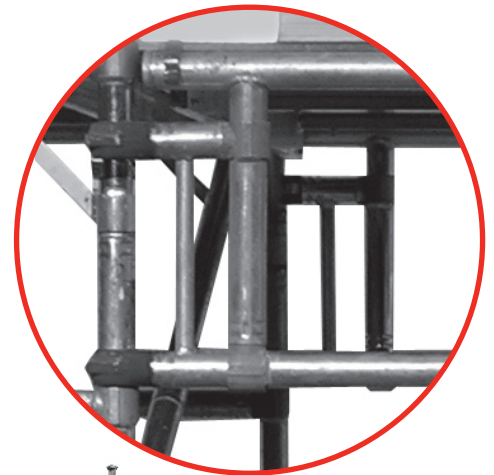

**Never climb on the outside of the frame!**